


## HS210 Brass Compression Fittings for Multilayer pipe

HONSON HS210 Brass compression Fittings for Multilayer pipe are well-designed and suitable to use in multilayer plumbing system. Provided with double O-ring seals, these fittings are used in sanitary water and heating system and are available in sizes from  $\varnothing 16$  to  $\varnothing 32$ . Easily installed and disassembled.

### Structure

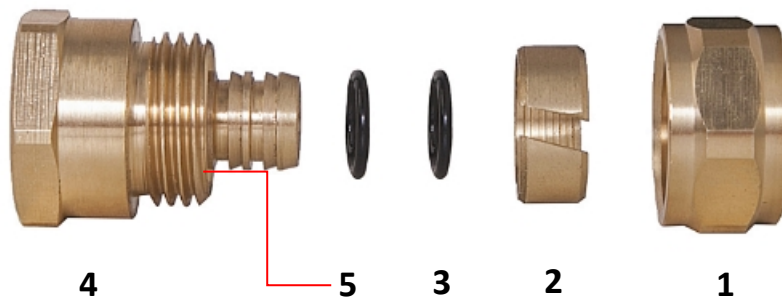

Item	Description	Materials
1	Nut	CW617N-DW / MS58
2	Lock Ring	MS58
3	O-ring	EPDM
4	Body	CW617N-DW / MS58
5	Insolation spacer	Plastic

### Features

- Ideal for use in plumbing system
- CE approved
- Double O-rings ensure excellent sealing characteristics
- Fast and simple installation with spanner
- Removable and reusable
- sizes from  $\varnothing 16$  to  $\varnothing 32$

- Marked for full traceability

### **Installation Instruction**

1. To avoid incorrect assembly, you should check the dimensions of the components before installation.
2. Cut the pipe perpendicular to its axis, using a shears (you are advised to rotate the shears slightly while you are cutting) or the wheel pipe-cutter.
3. Deburr and calibrate the internal surface of the pipe with appropriate tools.
4. Fit the nut, the lock ring on the pipe sequentially.
5. Fit the O-rings on the body.
6. Insert the pipe with the components on the body up to the mechanical stop.
7. Tighten the nut by hand first, then using tool tighten the nut.